

No: M-02.2531 - 05 2

Dat/Nam.: 08.03.2017 / K. Radke

Cad Code: M_022531

Technical changes reserved
Änderungen vorbehalten
Sous réserve de modifications**XFP 150J-CH2**

Dimension sheet PE4 DRY WELL Installation

Maßblatt PE4 Trockeninstallation

Plan d'encombrement PE4 installation fosse sèche

SULZER

Type Typ Type 60Hz	Weight Gewicht Poids MK		H		Size
	(~kg)	(~lb)	(~kg)	(~lb)	
PE 250/4-J-60	640	1411	1618	63.7	A
PE 350/4-J-60	675	1488			
PE 430/4-J-60	715	1577	1698	66.9	B
PE 520/4-J-60	745	1643			
PE 210/6-J-60	645	1422	1618	63.7	A
PE 250/6-J-60	685	1510			
PE 350/6-J-60	735	1621	1698	66.9	B
PE 430/6-J-60	750	1654			

Weight: Includes pump, skirt base and 10m cable

Gewicht: Beinhaltet Pumpe, Pumpenständer und 10m Kabel

Poids: Pompe, coulisseau et 10m de câble

For different cable length see IOM, chapter 1.5

Für abweichende Kabellänge siehe EBA, Kapitel 1.5

Pour des longueurs supérieures, voir la section 1.5 du manuel

Connection details acc. to drw. M-02.0410

Anschlussdetails nach Blatt M-02.0410

Détails des brides cf. dessin M-02.-0410

Foundation in acc. to drw. M-02.2705


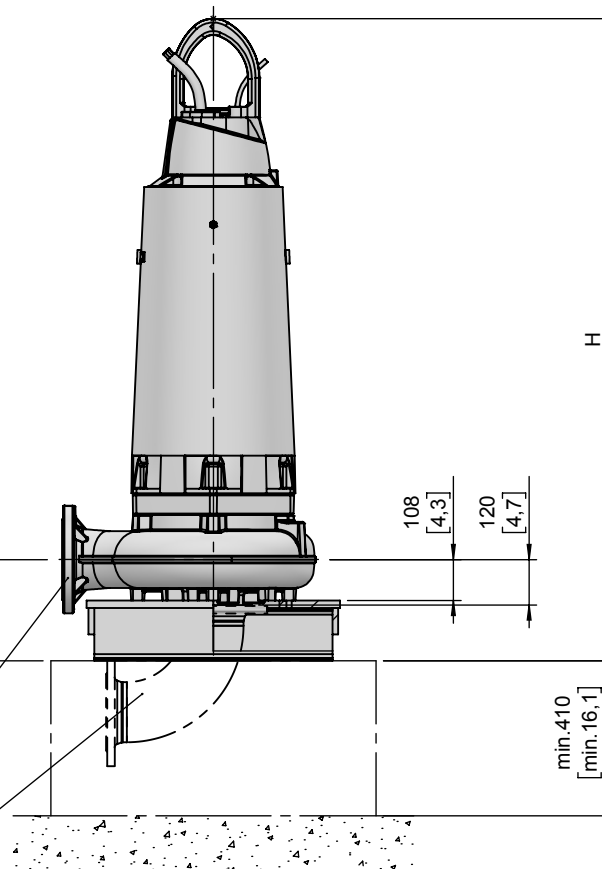
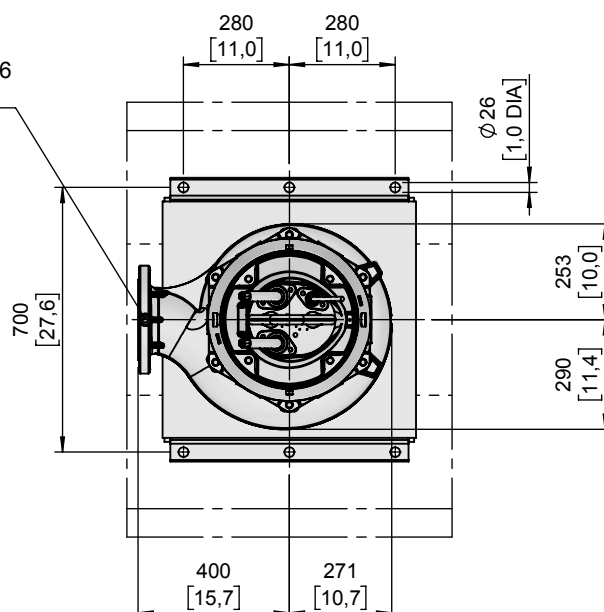
Fundament nach Plan M-02.2705

Fondation selon schéma M-02.2705

Lifting hoop cross section

Fangbügel-Querschnitt

Section de l'anse de levage

DN150, DIN EN 1092-2, PN16
6" ANSI B16.1 CLASS 125Elbow EN 10253-2 Typ 3 D
Long Radius Elbow - ANSI B16.9DN150, DIN EN 1092-2, PN16
6" ANSI B16.1 CLASS 125

MK = Mit Kühlmantel

With cooling jacket

Avec enveloppe de refroidissement

[mm
[inch]