

No: M-14.0502 - 02

Dat/Nam.: 18.12.2014 / L.Henrich

Cad Code: M_140502

Technical changes reserved
Änderungen vorbehalten
Sous réserve de modifications

XSB2500 "M"

Dimension sheet XSB2500 Concrete base 1030 (freestanding installation)

Maßblatt XSB2500 Betonsockel 1030 (freistehende Installation)



Plan d'encombrement XSB2500 Base de béton 1030 (installation libre)

SULZER

Type Typ Tipo	Weight Gewicht Poids unit only nur Antrieb mixeur seul (~kg)	Weight Gewicht Poids unit only nur Antrieb mixeur seul (~lb)	Weight Gewicht Poids Incl. concrete base Inkl. Betonsockel Incluant base de béton (~kg)	Weight Gewicht Poids Incl. concrete base Inkl. Betonsockel Incluant base de béton (~lb)
50Hz				
PA 12/4	294	648	944	2082
PA 19/4	299	659	949	2093
PA 25/4	304	670	954	2104
PA 35/4	294	648	944	2082
PA 40/4	304	670	944	2082
PA 45/4	304	670	954	2104
PA 55/4	299	659	949	2093

Propellergröße Propeller size Taille d'hélice	H*	
	(mm)	(inch)
XSB 1600	900	35.4
XSB 1800	1000	39.4
XSB 2000	1100	43.3
XSB 2200	1200	47.2
XSB 2500	1350	53.1

Weight: Includes pump, slider bracket and 10m cable
Gewicht: Beinhaltet Pumpe, Halterung und 10m Kabel
Poids: Pompe, coulisseau et 10m de câble

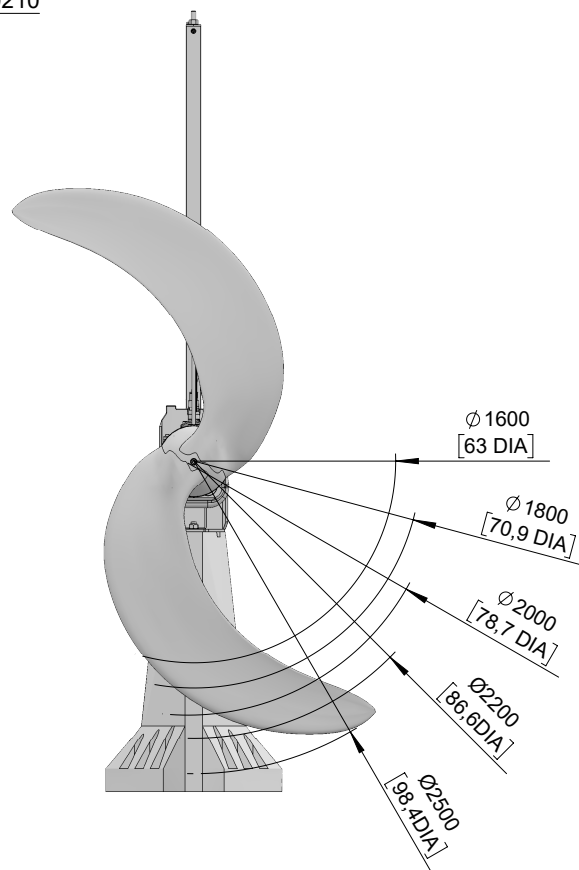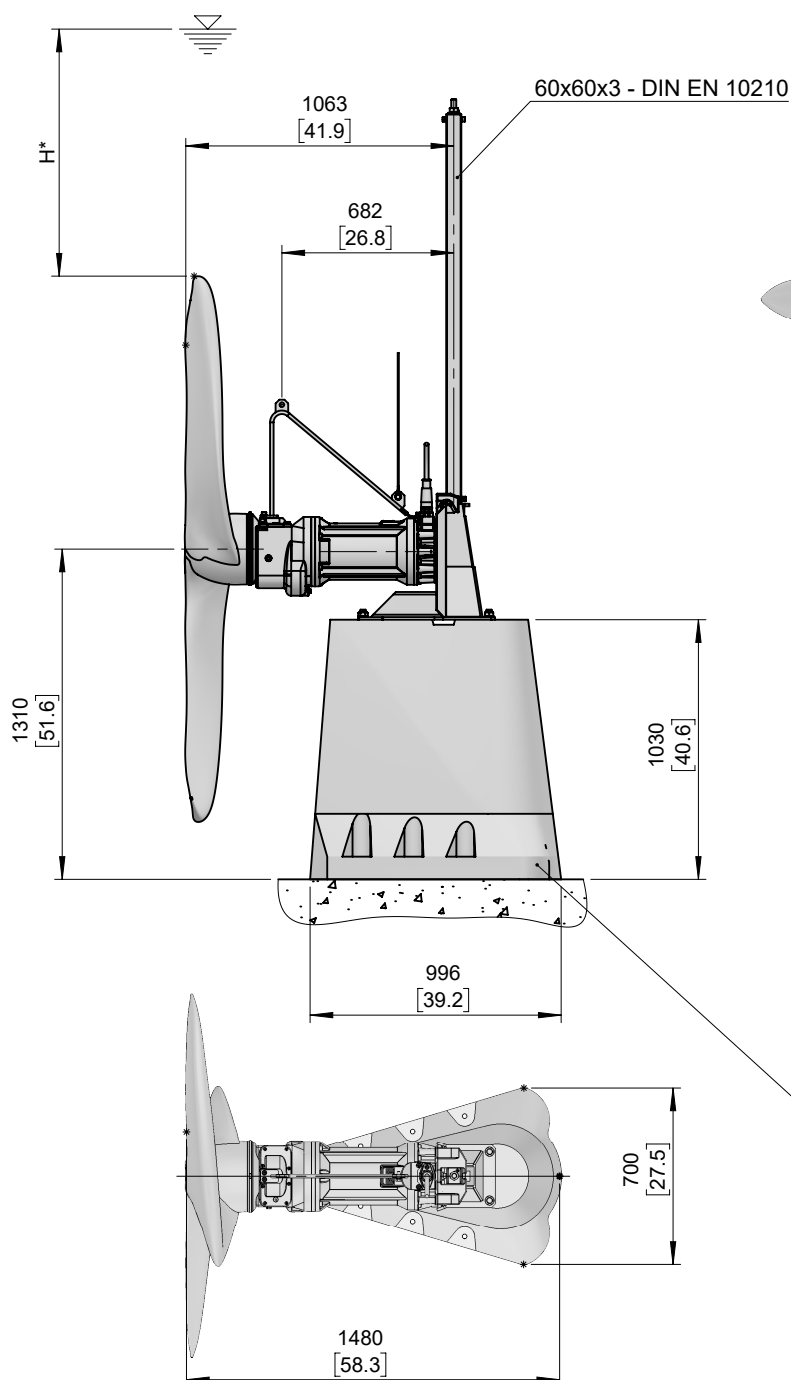

Concrete base (prefabricated)
Betonsockel (Fertigelement)
Base de béton (produit fini)

[mm
[inch]

*Guideline value: Minimum submergence can be lower
Richtwert: Die Mindestüberdeckung kann geringer sein
Valeur indiquée: la submergence minimale peut s'avérer inférieure en pratique